

Passive Submersible Transmitters

TM/N - Passive Level Transmitter



CUSTOMER BENEFITS

- Unreinforced output signal
- Fast customization thanks to configurable product design
- Short response times suitable for dynamic level measurements

Technical Specifications

PRESSURE MEASURING RANGE (MH2O)

	1 ... 5, (1)	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (2)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (3) ($\pm$ % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25$
Thermal shift ($\pm$ % FS/ $^{\circ}$ C)			
Zero point 0...70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25...85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0...70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25...85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Response time, (typ.)	< 0.1ms / 10...90% FS	< 0.1ms / 10...90% FS	< 0.1ms / 10...90% FS
Long term stability, (4)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) 0.5 mH2O on request

(2) Transducer

(3) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor


TYPICAL OUTPUT SIGNAL (MH2O)

	1 ... 2	> 2 ... 4	> 4 ... 10
Output signal, (1), (mV)	15	25	35

	> 10 ... 20	> 20 ... 250
Output signal, (1), (mV)	50	100

(1) At nominal pressure, 10 V DC

ELECTRICAL SPECIFICATIONS

Circuit diagram	
	
Input impedance	> 10 k Ω
Bridge resistance, (typ.)	3 k Ω
Supply voltage, (typ./max.)	10 / 15 V DC

PHYSICAL SPECIFICATIONS

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez
Cable	PUR, FEP, PE
Weight (2)	200 g

(1) Hastelloy (C-276) on request

(2) Specification for a TM/N, closed, without cable

Equipment

OVERVIEW

10.00.0091	Accessories overview

Additional documents

OPERATING AND SAFETY INSTRUCTIONS

Article number	
10.88.0369	DMM030

Ordering information

		X.	XXXX.	XXXX.	XX.	XXX
Type						
	TM/N	22				
Pressure type						
	Gauge	1				
	Absolute (vacuum)	2				
Pressure measuring range						
	50 mbar ... < 100 mbar	XX				
	100 mbar ... < 25 bar	XX				
	Offset, special adjustment	99				
Process connection						
	Closed, (Fig.1)	55				
	Open, (Fig.2)	56				
	G 1/4 M, (Fig. 3)	11				
	G 1/2 M, (Fig. 3)	13				
	Customized connections available	99				
Electrical connection						
	Connectable version, IP 68, (Fig. 4)	07				
	PE cable, IP 68, black, (5), (6)	13				
	PUR cable, IP 68, black (4), (6)	15				
	FEP cable, (high temperature), black, IP 68, (5), (12)	12				
	FEP cable, IP 68, black (6)	21				
Output signal						
	0...10 mV (11)	10				
	0...25 mV (11)	11				
	0...35 mV (11)	12				
	0...50 mV (11)	13				
	0...100 mV (11)	14				
	0...XXX mV (customized)	99				
Accuracy						
	$\leq \pm 0.5 \% \text{ FS}$	0				
	$\leq \pm 0.25 \% \text{ FS}$ (on request)	1				
Temperature range						
	-5...50 °C compensated process temperature: -5...50 °C	(allowed	4			
	-5...80 °C compensated process temperature: -5...80 °C (5)	(allowed	5			
	Customized		9			
Option 1						
	Special oil filling: Androl Food food applications)	(for	G			
Option 2						
	Electronics packed in gel: Gauge pressure		C			
	Electronics packed in gel: Absolute pressure		D			
Option 3						
	Ballast weight 1.4435		B			
	Version titanium (without ballast weight)		K			
	Seals: Viton (standard)		U			
	Seals: EPDM		S			

Seals: Kalrez (8)			T
Humidity filter element for gauge versions (only for PUR and PE cable)			Z
Cutting ring connection G1/2 male			
Strain relief			

(4) For operating temperature > 50°C, PE or FEP cable must be used

(5) Cable type PE and FEP pressure range <10 bar

(6) Specify type and length of cable and medium

(8) Only with FEP cable available

(11) According to datasheet

(12) max. 130°C @ 10 mH₂O, max. 110°C @ 50 mH₂O

Dimensions

Fig. 1: Closed version

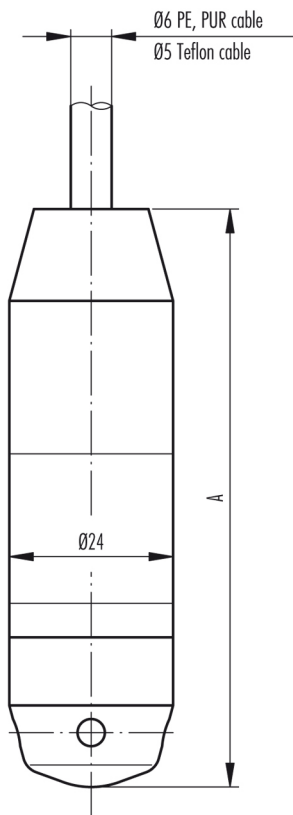


Fig. 2: Open version

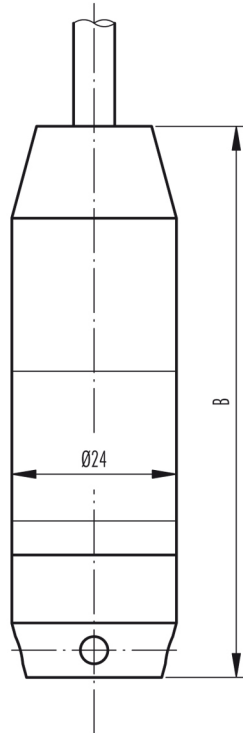


Fig. 3: with process connection


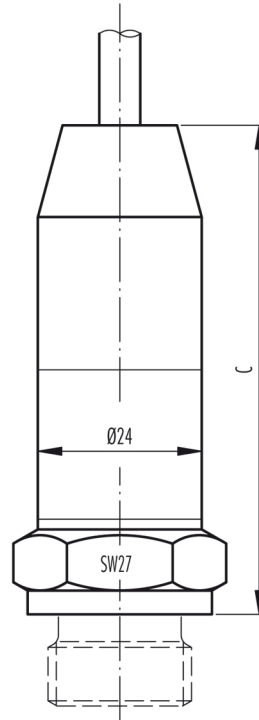


Fig. 4: Electrical connection, connectable

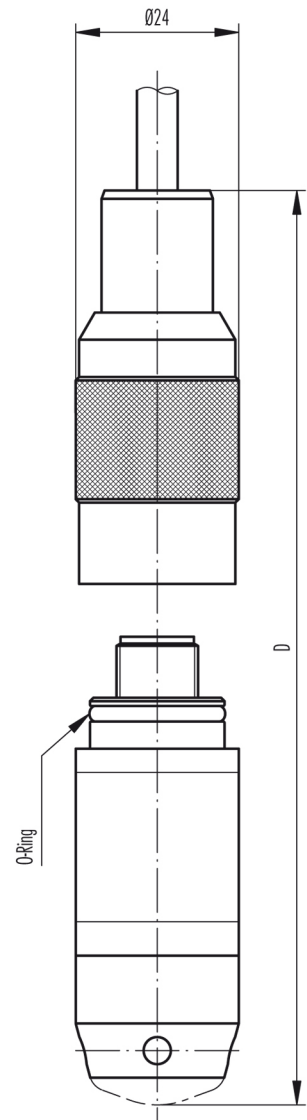

	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	85	81	on request	on request	approx. 200
with ballast weight	172	168	on request	on request	approx. 450

Colour	
white	+Vin
yellow	GND
brown	+Out
green	-Out